


## CATEGORY: Hot Stabs

## TMT 4 Port Hot Stab

Engineered Tooling Solutions **FAST**

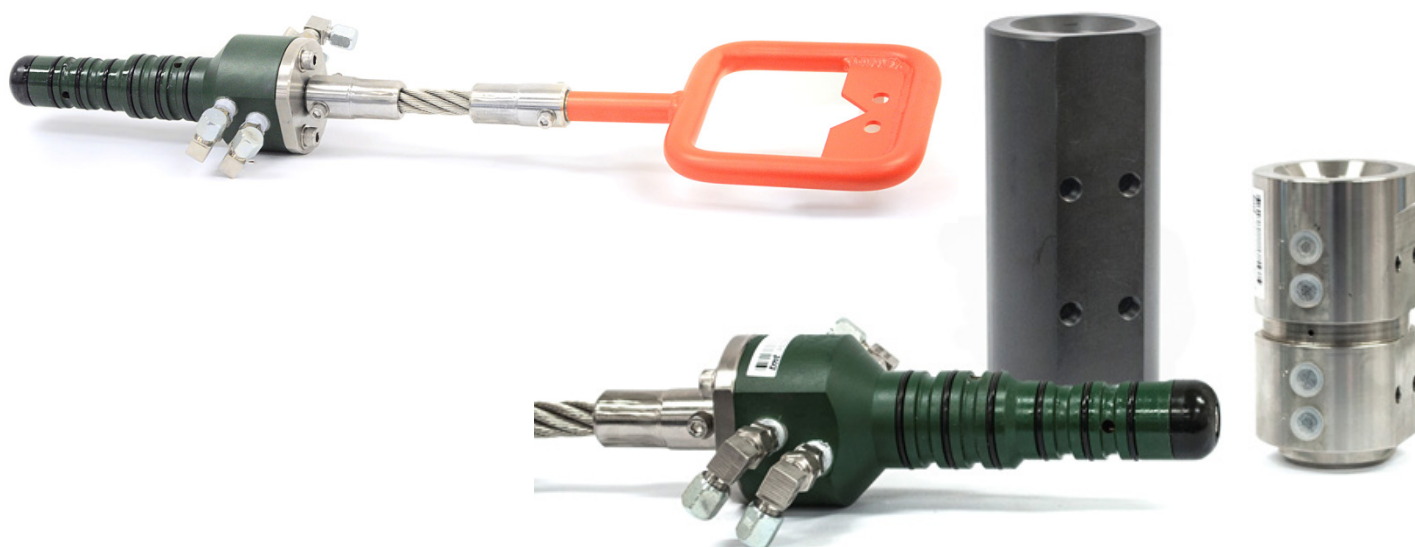

TMT can provide a TMT four (4) port customised hot stab. Hot stabs provide a means of transferring fluid subsea with almost no leaks to the environment. Hot stabs are mainly used for installation, intervention and completion purposes on subsea wellhead components. A variety of different fluids can be used with these stabs.

Xylan coating is standard on this type of hot stab to provide improved protection from corrosion, reduce friction and wear resistance.

TMT can also customise a hot stab to suit your needs ranging in size from a blank hot stab to multiple ports. The hot stab can be customised to suit most applications.

### Features:

- Male, Female & Dummy
- Different ROV handle options
- Stainless steel
- Multiple accessories
- 10,000psi
- Xylan coating

### Specifications:

- |                                 |                    |
|---------------------------------|--------------------|
| • Male Weight in Air            | 5.2Kg              |
| • Male Weight in Seawater       | 4.5kg              |
| • Female Weight in Air          | 3.0Kg              |
| • Female Weight in Seawater     | 2.7kg              |
| • Male Dummy Weight in Air      | 0.4Kg              |
| • Male Dummy Weight in Seawater | 0.1Kg              |
| • Pressure Ratings              | 10,000psi (690bar) |
| • Depth Rating                  | Unlimited          |

Specifications subject to change without notice. All rights reserved.